FIG 1
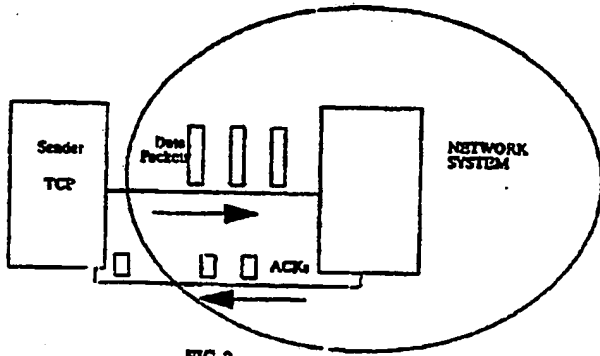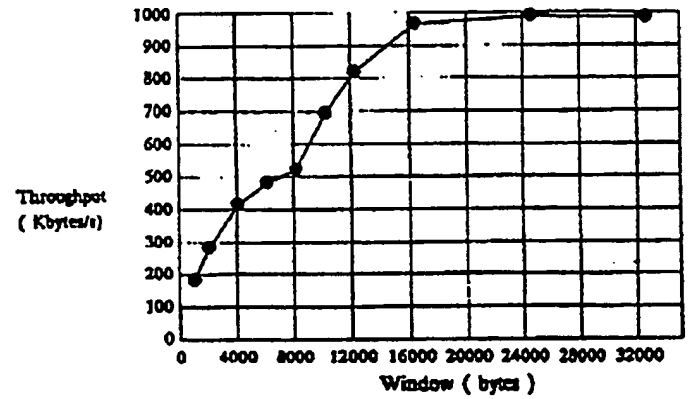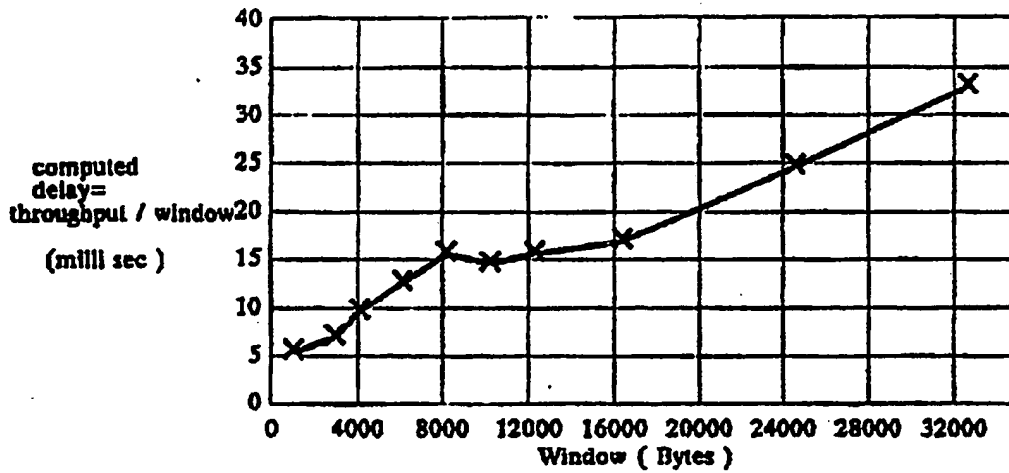

FIG 2

FIG 3

FIG 4

FIG 5

BEST AVAILABLE COPY

delay_0	delay_1	delay_2	. . . .
window_0	throughput_0 = window_0 / delay_0	throughput_1 = window_1 /delay_1	
	window_1 = delay_0 x bandwidth	window_2 = delay_1 x bandwidth	
T0	T1	T2	T3

TIME